

# PUSH POWER Product data sheet





# **SL-PPREC01AC-K60**

230V AC SWITCH ADAPTER



#### **TECHNICAL DRAWING**





#### **PRODUCT FEATURES**

- ▶ 230V AC MONO ON OFF receiver as receiver for push power switch
- Connection of 230V AC products with a maximum output of 3680 watts (~220V
   AC)
- ▶ Up to 10 switch buttons (2-way or 4-way switches) or switch components can be connected.
- Radio-based range up to 80 meters.
- ▶ Functions: ON OFF
- ▶ Repeater Mesh function to activate & deactivate

#### **ASSEMBLY**

Adapter is plugged in between 230V AC power connections.

#### **DIMENSIONS**

► Housing dimensions (LxDxH): 105 x 62 x 75 mm

#### **TECHNICAL FEATURES**

Transfer protocol: RF 433 mhzRange (without mesh): 30 meters (indoors)

▶ IP Rating: IP20

Input voltage: 220 - 240 AC 50/60Hz
Output power: 1 channel / 16 A

3680 Watt (~ 220V AC) 1500 Watt (~ 220V AC LED)

Standby Power: <0.3 Watt

Receiver Sensitiy: -110dBm

Operating temperature: -20°C to +55°C

## SAFETY AND INSTALLATION INSTRUCTIONS

- ▶ Attention, this product is operated with 230V AC voltage!
- Installation may only be carried out by qualified electricians.
- ▶ This product is not a toy and is not suitable for children!
- $\begin{tabular}{ll} \begin{tabular}{ll} \beg$
- Unprotected outdoor use is not permitted.
- Contact with moisture must be avoided at all costs!




#### **GENERAL FUNCTIONS**


Single click on indicator light:

Switching on or off



## **POSSIBLE COMBINATIONS**

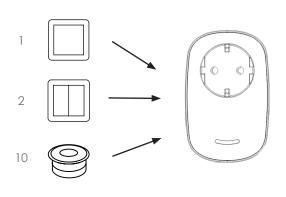

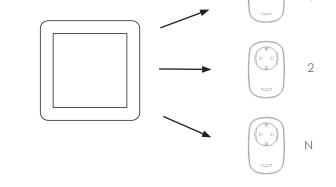


#### More controls on one receiver

a maximum of 10 PushPower control units (sensors, push buttons, etc.) can be connected to one receiver.

#### One control on several receivers

1 PushPower control unit can control any number of receivers to control.

## **CONNECTING THE CONTROL UNIT & RECEIVER**

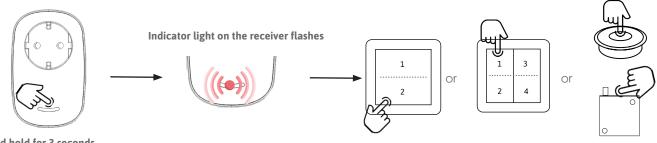

press and hold for 3 seconds

Press any button on a PushPower control unit.

2-way switch (2 options) or 4-way switch (4 options) or press the contact point for sensors

# **RESET RECEIVER**



press and hold for 7 seconds

Indicator light on the receiver lights up continuously and then switches off

# RoHS (€

Must not be disposed of with household waste.

Must not be disposed of in household waste.

SIRO fittings and metal goods factory Spielfeldstrasse 12 4452 Ternberg, Austria Tel . +43 (0)7256.6020.0 Fax . +43 (0)7256.8932 E-mail office@siro.at Web . www.siro.at © 2023 All rights reserved. All rights reserved