

PUSH POWER Product data sheet



SL-PPA55W2K1

2-way surface-mounted furniture switch with 60 mm frame






SWITCH ASSEMBLY

1 Frame

2 Rocker (2-way) with radio module

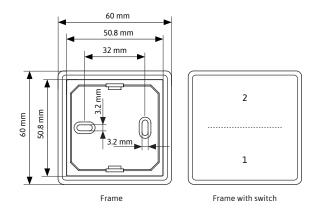

PRODUCT FEATURES

- ▶ 2-way switch for controlling SIRO PUSHPOWER receivers
- Also suitable for many 55 mm switch frame systems.
- No battery and no wiring necessary!
- ▶ Battery-free device without external power supply.
- Transmission energy is generated from mechanical energy when the rocker is actuated.
- ▶ Radio-based range up to 80 meters in open areas.
- ▶ 1 button can be connected to any number of Push Power Receivers.
- A changeover switch function is provided when several switches are used.
- Two independent MONO areas or one DUO area can be controlled.
- With DUO, DUO2-Pol and RGB, the first learned button is used to switch on/off and the button next to it is used for colour adjustment.
- Available in white (K60) and black (K1) versions.
- Frame included in the scope of delivery.

ASSEMBLY

- On smooth, flat surfaces by screwing or gluing
- ▶ 1. The substrate is clean, grease-free and stable.
 - 2. Press the frame (1) onto the adhesive points or fix it with screws.
 - 3. Attach the rocker with the radio module (2).

DIMENSIONS


Switch incl. frame (LxBxH): 60 x 60 x 17 mm
 Switch without frame (LxBxH): 55 x 55 x 17 mm

TECHNICAL FEATURES

▶ Transfer protocol: RF 433 mhz
 ▶ Range: 30 meters (indoors)
 ▶ IP Rating: IP20

SAFETY AND INSTALLATION INSTRUCTIONS

- This product is not a toy and is not suitable for children!
- ▶ The installation must be carried out without tension!
- ▶ This SIRO PUSHPOWER switch is only suitable for indoor use.
- Unprotected outdoor use is not permitted.
- ▶ Contact with moisture must be avoided at all costs!







GENERAL FUNCTIONS

1, 22-way buttonsSingle click:Switching on or offClick and hold button 1:Dimming 5 - 100%Click and hold button 2:Colour adjustmentClick and hold when switched off:Night mode (5% brightness)

POSSIBLE COMBINATIONS

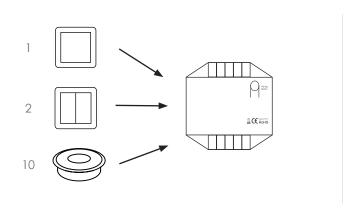

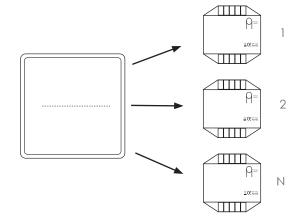


More controls on one receiver

a maximum of 10 PushPower control units (sensors, push buttons, etc.) can be connected to one receiver.

One control on several receivers

1 PushPower control unit can control any number of receivers.

CONNECTING THE CONTROL UNIT & RECEIVER

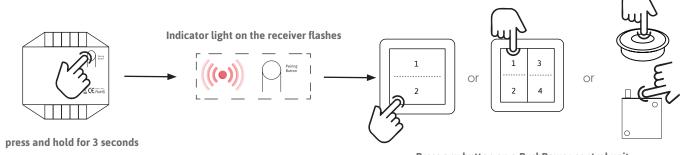

Press any button on a PushPower control unit.

2-way switch (2 options) or 4-way switch (4 options) or press the contact point for sensors

RESET RECEIVER



press and hold for 7 seconds

Indicator light on the receiver lights up continuously and then switches off

RoHS (€