

## SL-PPNBS-REC01MONO

24V DC MONO Receiver



scan for video

### PRODUCT FEATURES

- ▶ 24V DC MONO receiver as receiver for Push Power
- ▶ Ready to plug in for connection to SIRO 24V DC power supplies  
SL-NTS24CV36W-CA  
SL-NTS24CV60W-CA  
SL-NTS24CV100W-CA
- ▶ Up to 10 switch buttons (2-way or 4-way switches) or switch components can be connected.
- ▶ Radio-based range up to 30 meters.
- ▶ Functions: ON - OFF - DIMMING
- ▶ Product has a memory function (last light setting)

### DIMENSIONS


- ▶ Housing dimensions (LxWxH): 40 x 30 x 9 mm
- ▶ Cable length & AWG: 100 mm | 3polig - 24AWG

### TECHNICAL FEATURES

- ▶ Transmission protocol: RF 433 mhz
- ▶ Range (without mesh): 30 meters (indoors)
- ▶ IP rating: IP20
- ▶ Voltage: 24 V DC
- ▶ Output power: max. output power depending on power supply type  
36 watts / 60 watts / 100 watts



### TECHNICAL DRAWING

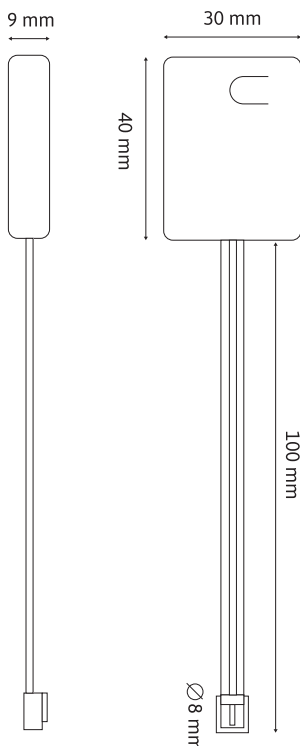

### SAFETY AND INSTALLATION INSTRUCTIONS

- ▶ This product is not a toy and is not suitable for children!
- ▶ The SIRO LED system is only suitable for indoor use.
- ▶ Unprotected outdoor use is not permitted.
- ▶ Contact with moisture must be avoided at all costs!
- ▶ Do not modify the product and only use it for its intended purpose.
- ▶ Only use the product for low-voltage applications
- ▶ The symbol of a crossed-out dustbin regularly shown on electrical and electronic equipment indicates that the respective device must be collected separately from unsorted municipal waste at the end of its service life.



Darf nicht in den Hausmüll entsorgt werden.  
Must not be disposed of in household waste.

SIRO Beschläge- und  
Metallwarenfabrik  
Spiefeldstraße 12  
4452 Ternberg, Austria

Tel . +43 (0)7256.6020.0  
Fax . +43 (0)7256.8932  
E-Mail office@siro.at  
Web . www.siro.at

© 2025 Alle Rechte  
vorbehalten.  
All rights reserved  
**Version 01/25**