

SL-M-CNW11WIP-5000
SIRO LED Mono-Stripe



Gesamtlänge: 5000 mm

500 mm

PRODUCT PROPERTIES

- » neutral-white LED stripe with 4000K color temperature
- » linear, dot-less light because of chip on board COB technology
- » light quality CRI >90
- » universal usage by adhesion on aluminum profiles
- » protection class: IP65
- » soldered input cable (500 mm) with SIRO MONO plug on on both ends
- » controllable and dimmable with SIRO MONO receiver SL-REC02MONO oder SL-REC04MONO-SD
- » **cut off segments require a new solder connection to achieve cable contacting !!**

TECNICAL SPECIFICATIONS

- » nominal power: 11 W/m
- » nominal voltage: 24V DC
- » beam angle (non-directional):..... 115°
- » operating temperature:..... -25° - +60° C
- » storage temperature: -40° - +80° C
- » length: 5 m
- » sectionseparation: every 45,2 mm

ENERGY EFFICIENCY:




Because of the complex production process of LED products the shown values are only statistical representations which deviate from lamp to lamp but not in a significant manner.

PHOTOMETRIC SPECIFICATIONS

- » rated luminous flux: 1100 lm/m
- » nominal luminous flux: 1100 lm/m
- » color temperature:..... 4000K
- » color rendering index Ra:..... 90
- » LED-type SMD Microchip
- » LED per Meter:..... 528

DIMENSIONS

- » length: 5.000 mm
- » width: 8 mm
- » height:..... 1,5 mm

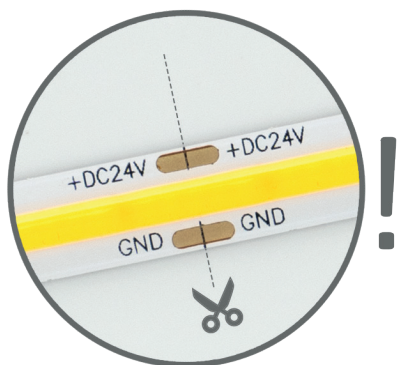

Cut LED striped only at marked spots!!