

SL-MONO-AWW10W-5000

SIRO LED Mono-Stripe // Diamond Series



PRODUCT PROPERTIES

- » warm-white LED stripe
- » tiny and robust LED chip
- » brilliant light quality CRI >95
- » universal usage because of glue on backside of stripes
- » long life cycle
- » protection class: IP20
- » soldered input cable (500 mm) with SIRO DUO plug on both ends
- » controllable and dimmable

TECNICAL SPECIFICATIONS

- » nominal power: 9,6 W/m
- » nominal voltage: 24V DC
- » beam angle: 120°
- » operating temperature: -25° - +60° C
- » storage temperature: -40° - +80° C
- » length: 5 m
- » section separation: every 50 mm

PHOTOMETRIC SPECIFICATIONS

- » rated luminous flux: 540 lm/m
- » nominal luminous flux: 540 lm/m
- » color temperature: 1700K
- » color rendering index Ra: >95
- » LED-type SMD Microchip
- » LED per meter: 140


DIMENSIONS

- » length: 5.000 mm
- » width: 8 mm
- » height: 1,5 mm
- » netto weight: 56 g

DIAMOND SERIES
brilliant - high durable led stripe



Because of the complex production process of LED products the shown values are only statistical representations which deviate from lamp to lamp but not in a significant manner.

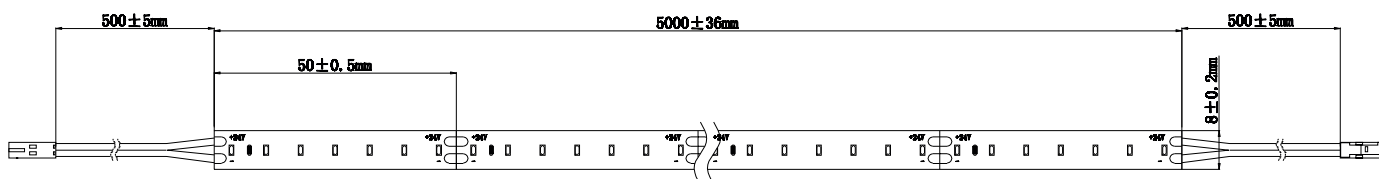

Can **not** be disposed into domestic waste.

SIRO Beschläge- und
Metallwarenfabrik
Ges.m.b.H.
Spielfeldstraße 12

4452 Ternberg
Austria
Tel . +43 (0)7256.6020.0
Fax . +43 (0)7256.8932

E-Mail office@siro.at
Web . www.siro.at ©
2018 All rights reserved.