


SL-MONO-HXWW15W-5000

SIRO LED Mono-Stripe

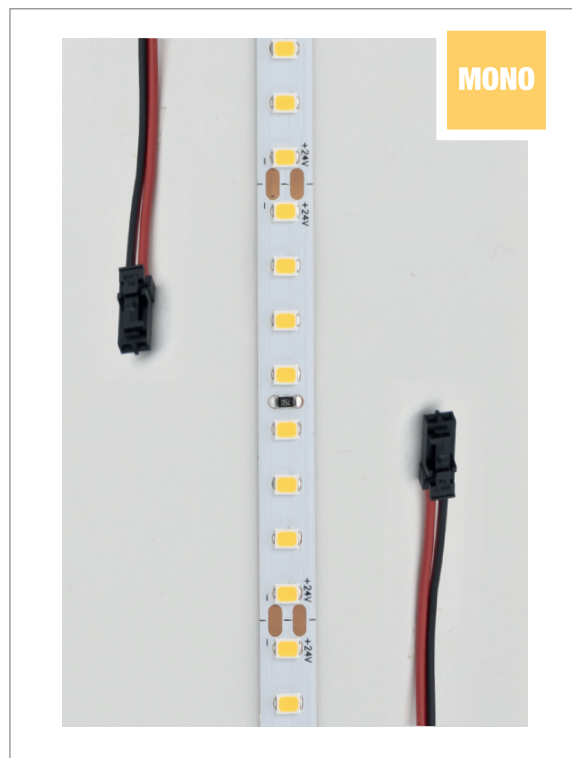

PRODUCT PROPERTIES

- » extra warm-white LED stripe with 2700K color temperature
- » high efficiency with high luminous output
- » good light quality CRI 80
- » universal usage by adhesion on aluminum profiles
- » long lifespan
- » protection class: IP20
- » soldered input cable (500 mm) with SIRO MONO plug on on both ends
- » controllable and dimmable

TECNICAL SPECIFICATIONS

- » nominal power: 15 W/m
- » nominal voltage: 24V DC
- » beam angle (non-directional): 120°
- » operating temperature: -25° - +60° C
- » storage temperature: -40° - +80° C
- » length: 5 m
- » section separation: 62,5 mm

ENERGY EFFICIENCY:



Because of the complex production process of LED products the shown values are only statistical representations which deviate from lamp to lamp but not in a significant manner.

PHOTOMETRIC SPECIFICATIONS

- » rated luminous flux: 2000 lm/m
- » nominal luminous flux: 2000 lm/m
- » color temperature: 2700K
- » color rendering index Ra: 80
- » LED-type SMD Chip
- » LED per Meter: 128

DIMENSIONS

- » length: 5.000 mm
- » width: 8 mm
- » height: 1,5 mm