



## SL-SPOT06-WW3W-ZN1

SIRO LED Mono Spot

MONO




3000K

### ENERGY EFFICIENCY:

A++

Because of the complex production process of LED products the shown values are only statistical representations which deviate from lamp to lamp but not in a significant manner.

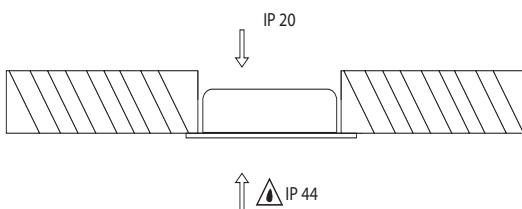

### PRODUCT PROPERTIES

- » built-in spot, quick and easy installation
- » soldered input cable (2000 mm) with SIRO MONO plug
- » controllable and dimmable with SIRO REC02MONO receiver
- » directly connectible to a SIRO 24 VDC power adapter (20W // 60W)
- » protection class: IP20 (back-side) // IP 44 (front-side)
- » frame color: shiny chrome

### TECNICAL SPECIFICATIONS

- » nominal power: ..... 2,5 W/m
- » nominal voltage: ..... 24V DC
- » beam angle (non-directional): ..... 150°
- » operating temperature: ..... -25° - +60° C
- » storage temperature: ..... -40° - +80° C

### PHOTOMETRIC SPECIFICATIONS

- » rated luminous flux: ..... 200 lm/m
- » nominal luminous flux: ..... 200 lm/m
- » color temperature: ..... 3000K
- » color rendering index Ra: ..... 80

### DIMENSIONS

- » diameter: ..... 68 mm
- » height: ..... 11 mm
- » installation diameter: ..... 55 mm
- » installation depth: ..... 12 mm

