

LED BUILT-IN-SPOT

Product Data Sheet



SL-SPOT07-NW2W-PB12

SIRO LED Mono Mini Spot

MONO




4000K

ENERGY EFFICIENCY:

A++

Because of the complex production process of LED products the shown values are only statistical representations which deviate from lamp to lamp but not in a significant manner.

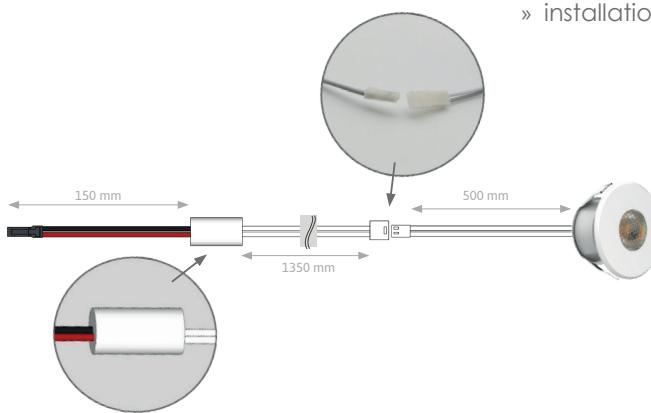

RoHS

Can **not** be disposed into domestic waste.

PRODUCT PROPERTIES

- » small 1,5 watt spot with big effect
- » built-in spot, quick and easy installation
- » soldered input cable (2000 mm) with SIRO MONO plug
- » controllable and dimmable with SIRO MONO receiver
- » directly connectible to a SIRO 24 VDC power adapter (20W // 60W)
- » protection class: IP20 (back-side) // IP 44 (front-side)
- » frame color: black

TECNICAL SPECIFICATIONS


- » nominal power: 1,5 W
- » nominal voltage: 24V DC
- » beam angle (non-directional): 45°
- » operating temperature: -25° - +60° C
- » storage temperature: -40° - +80° C

PHOTOMETRIC SPECIFICATIONS

- » rated luminous flux: 100 lm
- » nominal luminous flux: 100 lm
- » color temperature: 4000K
- » color rendering index Ra: >90

DIMENSIONS

- » diameter: 22,0 mm
- » height: 14,5 mm
- » installation diameter: 18,0 mm
- » installation depth: 13,5 mm



SIRO Beschläge- und
Metallwarenfabrik
Ges.m.b.H.
Spielfeldstraße 12

4452 Ternberg
Austria
Tel . +43 (0)7256.6020.0
Fax . +43 (0)7256.8932

E-Mail office@siro.at
Web . www.siro.at
© 2019 Alle Rechte
vorbehalten.